


# IFD-CE Series Intumescent Fire Dampers

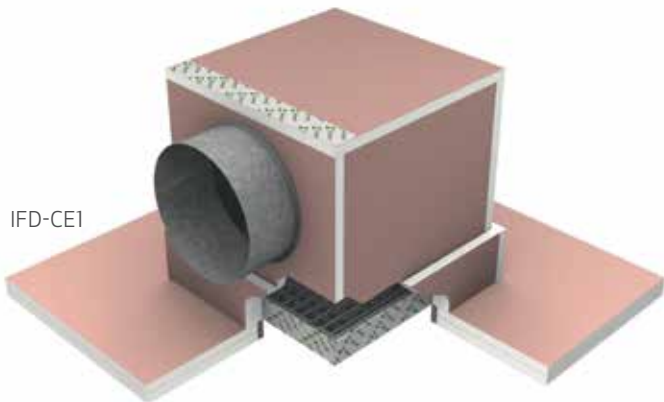

## Performance Characteristics



For airflow, pressure and acoustic data please refer to the IFD44 nomogram details in the technical section of the catalogue.

## Suggested Specifications

Fire dampers shall be Kilargo IFD-CE series intumescent fire dampers. The installation shall be in accordance with approved Kilargo systems installation details and must comply with the requirements AS/NZS 1668.1 and the air leakage test of AS 1682.1.

Fire dampers must allow bi-directional airflow and have no moving parts.

## Alternate Ceiling Systems

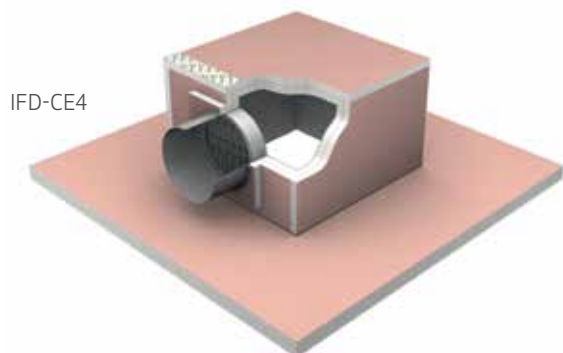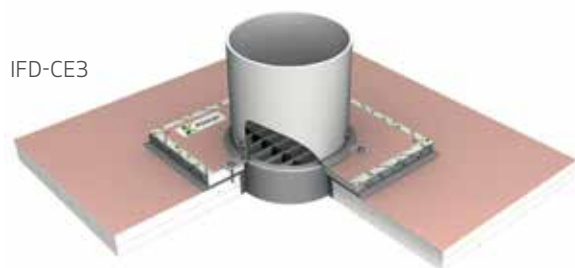

## Features

- Moisture resistant
- Innovative light weight design
- Space savings compared to old mechanical Rat Trap designs
- Suitable for use with supply grilles & return air diffusers
- Reduced maintenance & resultant cost savings
- Ideal for a retrofit in Fire Safety upgrades

\* IFD-CE1 also available in a Lo-Profile option with oval spigot, for reduced ceiling heights.

## Technical Data

- Integrity Fire Rating - up to 1 ½ hours
- Insulation Fire Rating - up to 1 ½ hours
- Max. size available as per Ceiling Mounted System Sheets

NB: Grille/Diffusers supply by others

### How to Order

Select IFD-C to suit system type and ceiling diffuser or grille size.

IFD-CE1 \_\_\_\_\_

i.e. IFD-CE1-200200

IFD-CE3- \_\_\_\_\_

i.e. IFD-CE3-150

IFD-CE4 \_\_\_\_\_

i.e. IFD-CE4-400