

Product Fact Sheet

FDBU20

Integrity
Architectural Door Seals

Description

Retrofit intumescent fire door bottom upgrade seals.

Application

Used to upgrade existing fire doors where door bottom gaps exceed the allowable 10mm as per AS1905/1.

Key Features

- Can provide up to 2 hours fire resistance when fitted to the bottom of proprietary fire doors.
- Non compliant fire doors can be salvaged.
- Avoids expensive door build-ups or door replacements.
- Cost-effective solution.
- Easy retro-fit installation.
- No need to remove the door during installation.

Use With

Although not required for upgrade work, the Kilargo Integrity 4000 Series Threshold Plates may be incorporated as part of the overall system for both aesthetic and disability compliance issues.

Materials

These products consist of an anodised aluminium profile, flame retardant smoke, draught and light excluding silicone gasket and integral high performance intumescent fire seals.

Gap Size

FDBU20: To seal gap sizes up to 20mm maximum, under nom. 35mm and 45mm proprietary doors.

Sizes

Standard lengths: 820mm, 920mm, 1220mm

Finish

■ **Colours:** Clear Anodised (Silver) with grey gaskets

Fixing

The FDBU20 is supplied with pre-drilled slotted holes and screws for easy application onto the bottom of door leaves.



Approval/s

- Fully tested to AS1530.4 for up to 2 hours on proprietary fire door assemblies.
- Complies with AS1905/1.

NB: Check with your door manufacturer for approvals.

Specifications

Kilargo FDBU20 intumescent door bottom seal fitted to the bottom of the door leaf.

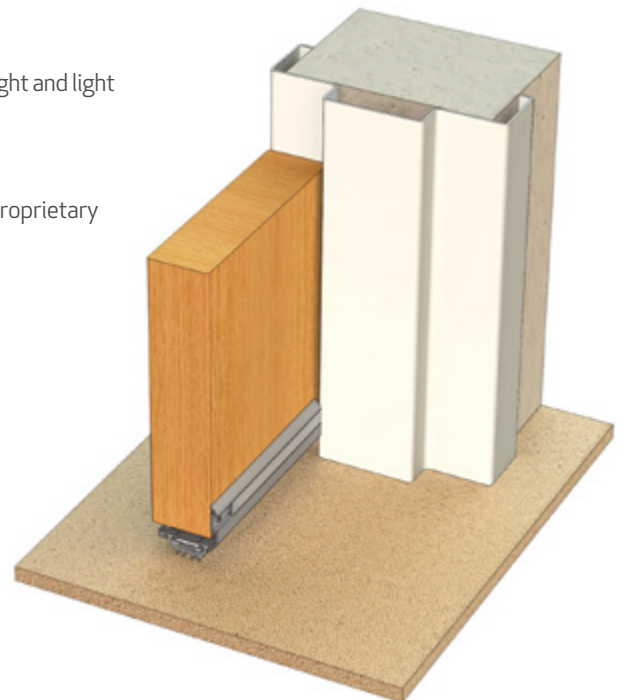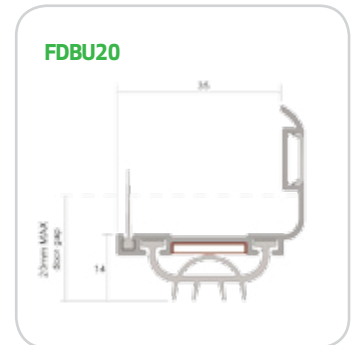

All measurements in millimetres. © Copyright Kilargo Pty Ltd.

Kilargo reserves the right to alter published data or make products obsolete without prior notice.

15 Wentworth Place, Banyo Qld 4014
T +61 7 3635 5000 F +61 7 3861 9266 E sales@kilargo.com.au www.kilargo.com.au

 **Kilargo**